


Alarm Cable Unshielded 4X22 AWG

100% Copper Libre de halógeno (LSZH)



Condusur USA®

Calidad que conduce energía

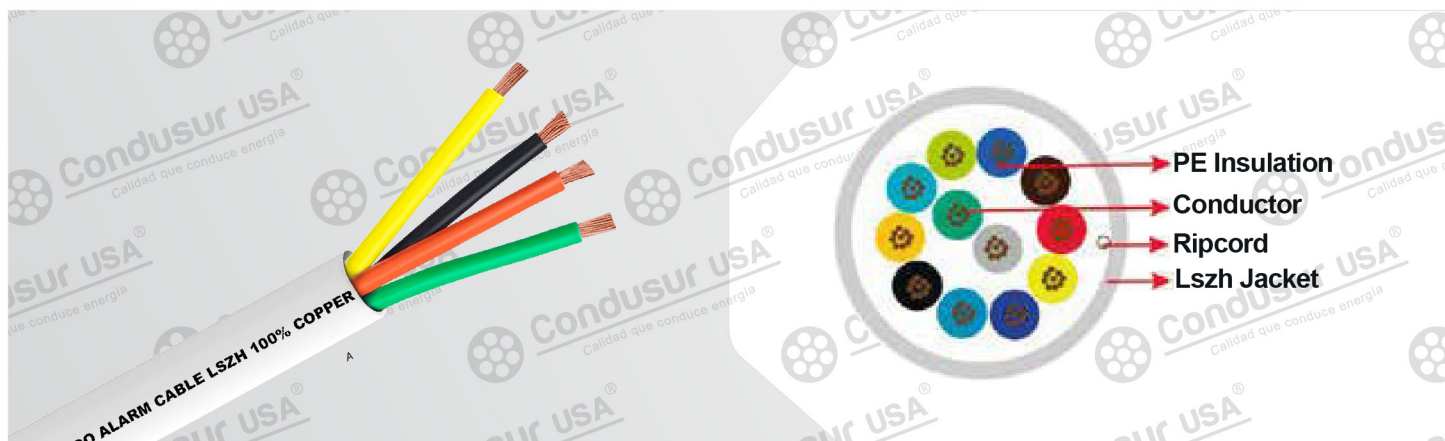

FICHA TÉCNICA

LIBRE DE HALOGENO (LSZH)

DESCRIPTION

Unshielded Alarm Cable 4X22awg
LSZH Jacket 1000 ft

FEATURES

- 4Core Alarm Cable
- High Quality Conductors
- Fire Resistance LSZH
- 1000ft Pull Box Packing
- RoHS Compliant
- UL ESTANDAR 2250

APPLICATION

Alarm Signal System Connect
Smoke Detectors / Wiring Of Alarms
Burglar Alarms
CCTV System

MODEL

No	Length	Spec.
110901	1000ft (305m)	22/2
110902	1000ft (305m)	22/4
110903	1000ft (305m)	22/6
110904	1000ft (305m)	22/8
110905	1000ft (305m)	22/10
110906	1000ft (305m)	22/12

SPECIFICATION

Technical Data

Temperature Rating	-20 C to 60 C
Operating Voltage	300 - 600 V/RMS Max.
Application	Alarm System

Conductor

Material	100% copper
Conductor Diameter	4x 7/0.2 mm

Insulation

Material	Poly Ethylene
AVG. Thickness	0.2mm
Insulation Diameter	1.05mm

Jacket

AVG. Thickness	0.75 mm
Jacket Diameter	6.2 mm
Color	White
Marking On Jacket	Available

Packing

Inner Box	Pull Out Box
Outer Box	Brown Carton

22awg

PE

Fire Rated LSZH

Baja emisión de humo - cero Halógenos.
0.75 mm
6.2 mm
White
Available

Box

Pull Out Box
Brown Carton

CERTIFICACIONES




Alarm Cable Unshielded 4X22 AWG

100% Copper Libre de halógeno (LSZH)



Condusur USA®
Calidad que conduce energía

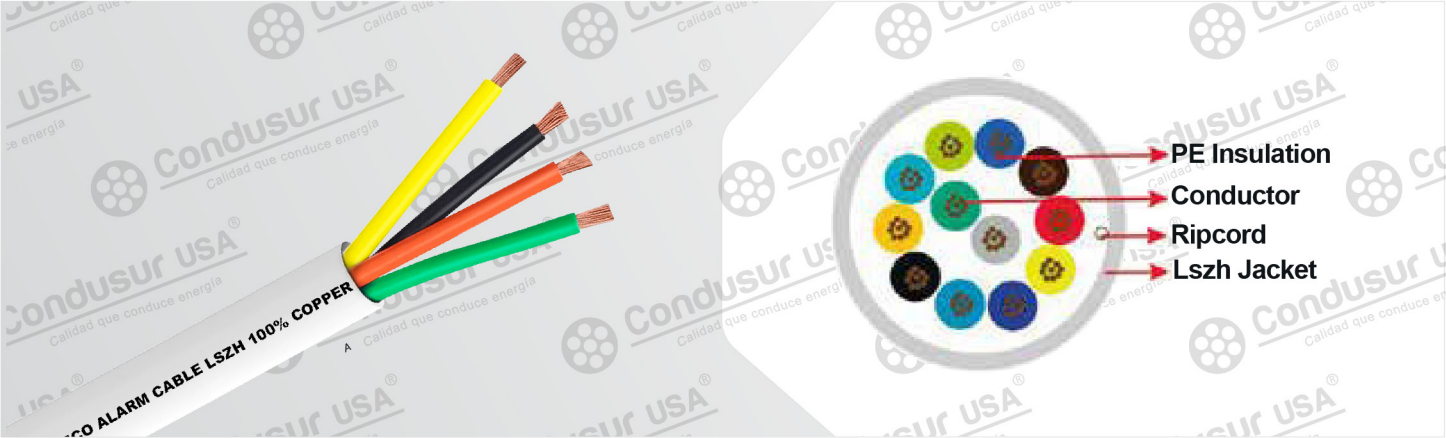

RELATED UNSHIELDED PRODUCTS

LIBRE DE HALOGENO (LSZH)

Number Of Cores	N/A	10	8	6	4	2
Conductor	Material	Grade C copper	Grade C copper	Grade C copper	Grade C copper	Grade C copper
	Size (mm)	7/0.2	7/0.2	7/0.2	7/0.2	7/0.2
Insulation	Material	PE	PE	PE	PE	PE
	AVG. Thick. (mm)	0.2	0.2	0.2	0.2	0.2
	Diameter (mm)	1.05	1.05	1.05	1.05	1.05
Jacket	Material	PVC	PVC	PVC	PVC	PVC
	AVG. Thick (mm)	0.75	0.75	0.75	0.75	0.75
	Diameter (mm)	5.8	5.4	5	4.5	3.5



CERTIFICACIONES

