


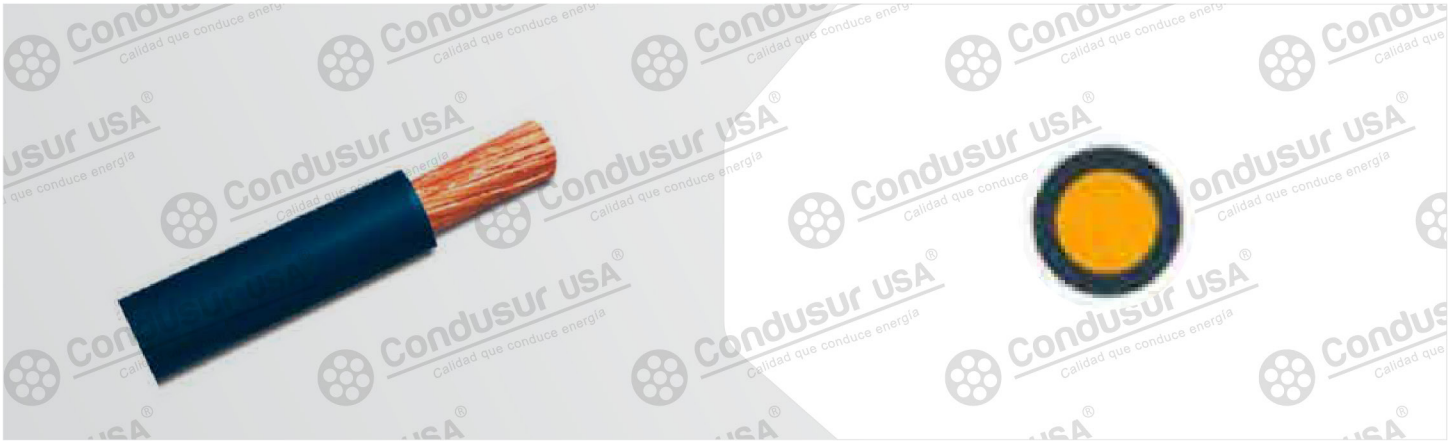

FICHA TÉCNICA

DESCRIPTION

Cable 20AWG 18AWG 16AWG 14AWG 12AWG
10AWG 8AWG Stranded Copper Cable Full Color

FEATURES

- High Quality Power Cable
- Stranded Bare Copper Conductors
- PVC Insulated
- Voltage 300/500V - 450/750V
- ISO9001CE ROHS FCC

APPLICATION

Building Lighting
Electricity Transmission
Switchgear Wiring

MODEL

No	Length	Spec.
180520	100 Meter	20AWG
180518	100 Meter	18AWG
180516	100 Meter	16AWG
180514	100 Meter	14AWG
180512	100 Meter	12AWG
180510	100 Meter	10AWG
180508	100 Meter	8AWG

SPECIFICATION

Technical Data

Reference Standard BS6004/IEC 60227

Conductor

Material Bare Copper (100% Copper)
AWG 20/18/16/14/12/10/8AWG
Conductor Diameter 0.517/0.821/1.31/2.08/3.31/
5.26/8.37 mm²

Insulation

Materials Polyvinyl Chloride


AWG	Avg. Thickness	Insulation Ø
20AWG	0.65	2.5
18AWG	0.7	2.9
16AWG	0.7	3.2
14AWG	0.8	4.0
12AWG	0.8	4.8
10AWG	0.8	5.5
8AWG	1.0	6.5

Color

Red
Black
White
Blue
Green
Pink

Marking

Available

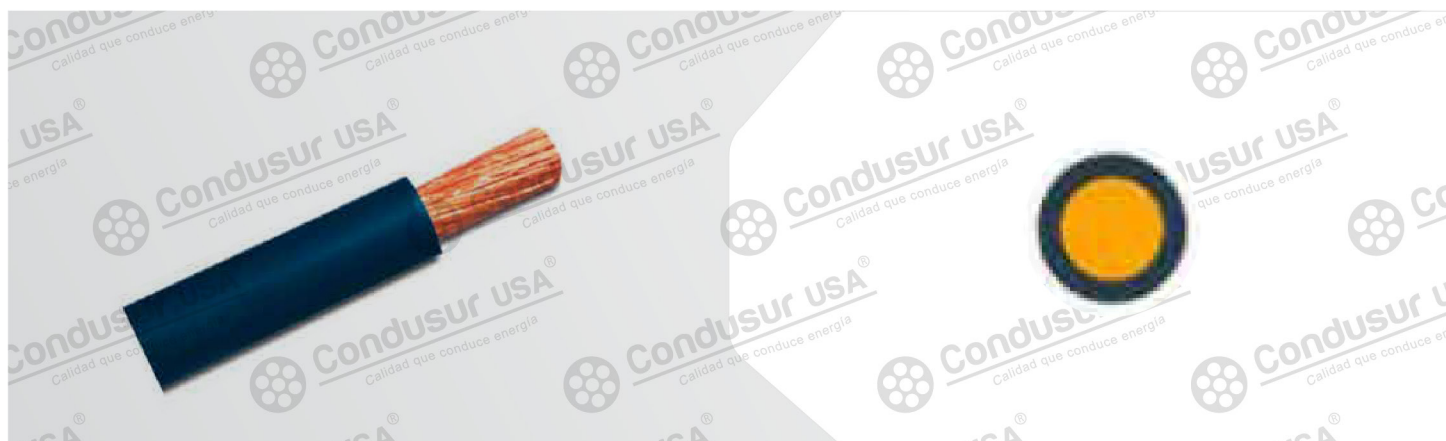

FICHA TÉCNICA

PACKING

Plastic Bag With Sticker
Outer Brown Carton



PERFORMANCE

Mechanical Properties

Temperature Range
Voltage Rating
Standards

During Operation: 70°C ~ 105°C
300%500V, 450/750V
Generally to BS6004