


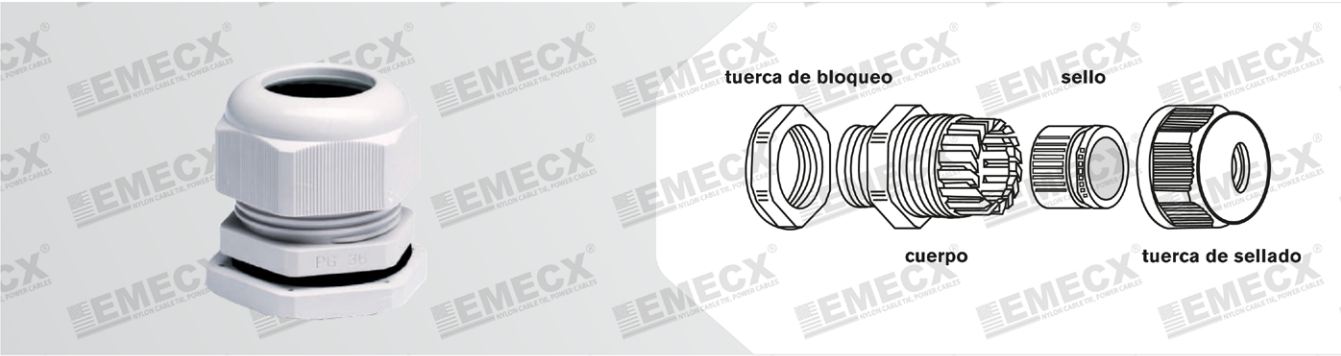

Ficha Técnica

DESCRIPCIÓN

Temperatura de Trabajo.

- Estado estático: -40°C. a 100°C.
- Estado dinámico: -40°C. a 100°C.
- Resistencia al calor instantáneo: Hasta 120°C.
- Resistencia UV
- Incluye una banda interna de neopreno para un mejor sellado y sujeción.

| CÓDIGO    | D1   | D2   | L1   | L2  | L3   | L4   | B1   | CABLE RANGE |
|-----------|------|------|------|-----|------|------|------|-------------|
|           | MM   | MM   | MM   | MM  | MM   | MM   | MM   |             |
| PG-N07    | 12.6 | 8.5  | 8.4  | 5.5 | 13.4 | 12   | 6.8  | 3.5-6       |
| PG-N09    | 15.5 | 11   | 8.5  | 5.5 | 15   | 13.5 | 8.8  | 4-8         |
| PG-N011   | 18.3 | 13.4 | 8.5  | 5.5 | 17   | 15   | 10.8 | 5-10        |
| PG-N013.5 | 20.5 | 15.4 | 8.5  | 5.5 | 18   | 15   | 12.8 | 6-12        |
| PG-N016   | 23   | 17.9 | 10.5 | 6   | 18.5 | 16.5 | 14.8 | 10.14       |
| PG-N019   | 24.5 | 19   | 11   | 6   | 20   | 19   | 16   | 12-15       |
| PG-N021   | 28.5 | 23   | 10.8 | 6   | 20.7 | 20   | 18.9 | 13-18       |
| PG-N024   | 32.5 | 27   | 11.8 | 7   | 24.2 | 22   | 22.8 | 15-22       |
| PG-N029   | 36.6 | 29   | 11.4 | 7.5 | 26.1 | 24   | 25.8 | 18-25       |
| PG-N036   | 47.8 | 39   | 15   | 7.5 | 31   | 28   | 33.8 | 22-32       |
| PG-N042   | 55   | 46   | 13.2 | 8   | 33.8 | 30   | 39   | 30-38       |
| PG-N048   | 60   | 52   | 14.2 | 8   | 34.8 | 31   | 45   | 34-44       |
| PG-N063   | 71.4 | 63.8 | 19.8 | 8.8 | 41.4 | 41.6 | 55   | 42-54       |